



UNiLUX

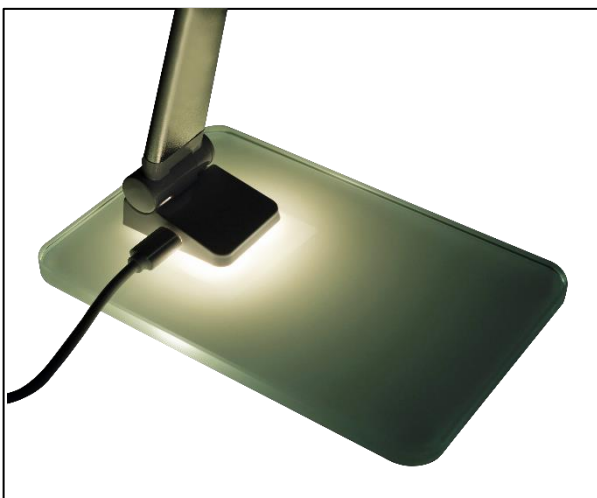
POPY

POPY white



POPY is a modern and functional lamp that offers variable brightness and color temperature, ideal for creating different atmospheres with its intuitive touch base, compact design featuring flexible arms and head, USB-powered convenience, and stability ensured by a sturdy glass base.

POPY black



UNILUX



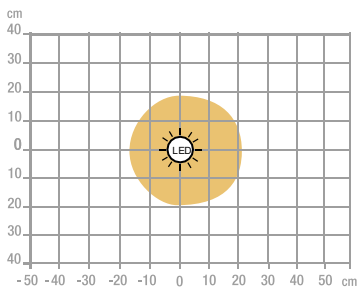
- **Variation in light intensity and color temperature:** change the lighting ambiance in an instant with POPY. A simple touch on its touch-sensitive base allows you to adjust between 3 levels of color temperature, while continuous pressure adjusts the light intensity.
- **Functional:** practical, its flexible arm and head make it ultra-compact, perfect to accompany you on travels or in meetings.
- **USB port:** plug it directly into a USB port for easy use.
- **Design:** the combination of glass and aluminum will bring a touch of elegance to your workspace.
- **Night light mode:** use its soft light as a night light for a cozy ambiance.
- **Stability:** its weighted and sturdy glass base, 0.8 cm thick, ensures perfect stability of the lamp wherever you place it.

Warranty: 2 years
 Max height: 38 cm / minimum height: 25 cm
 Materials: glass base/arm and aluminum head



Features

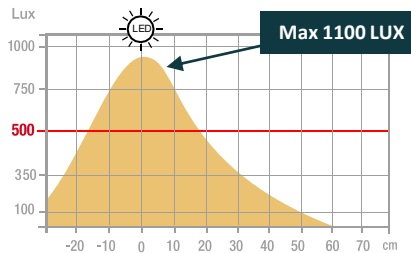
Lux measurement on the work surface in top view at 35 cm:



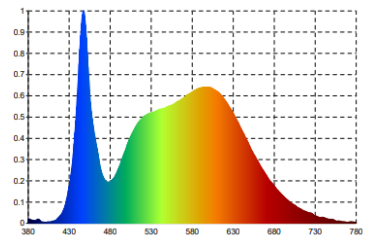
> 500 Lux

< 500 Lux

Lux measurement on the work surface in profile view at 35 cm:



Measurement in nanometers of the light spectrum



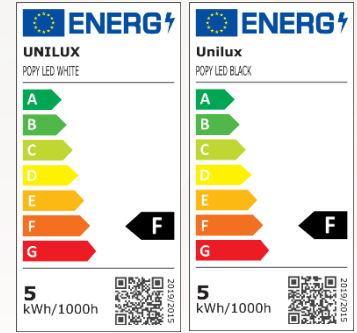
- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP no.	400124478	400153693
EAN code	3595560029433	3595560031665
Color	White/grey metal	Black
Luminous flow	408	408
Lux at 35cm (Lx)	1100 at 35 cm	1100 at 35 cm
Lm/W	84	84
Color T* (K)	3000/4500/7000	3000/4500/7000
CRI	87	87
Source lifetime (h)	50 000	50 000
Energy consumption (kWh/1000 h)	5	5
USB Port	Yes	Yes
Inductive charger	No	No
Net weight (kg)	0,55	0,55

ENVIRONMENT

UNILUX focuses on sustainable development and takes concrete measures to reduce its environmental footprint and best meet the evolving expectations of its consumers.

We are notably committed to reduce our greenhouse gas emissions by 29% between 2021 and 2030 in response to the "Net Zero Carbon Emissions by 2050" challenge. Eco-design, emissions reduction and continuous improvement are at the core of our concerns.



OUR EXPERTISE

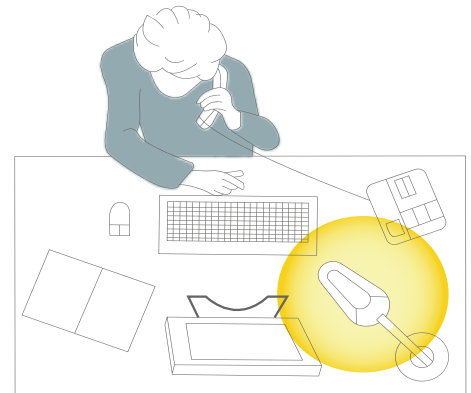
Task lighting

In the office, we are often exposed to constant artificial lighting. Poor lighting quality can lead to headaches, sleep disturbances, and decreased concentration. According to a recent study, only 34% of workspaces achieve the recommended illuminance level of 500 lux by Occupational Medicine, in accordance with DIN EN 12464-1* standard. Task lighting is frequently used to provide additional brightness when the primary lighting is insufficient.

* Standard setting the limits that workplace lighting must adhere to.

Our tips to light up your workspace :

- Position your desk near windows to benefit from natural daylight and reduce eye fatigue.
- Ensure that the lamp head is positioned at least 35 cm above the work surface.
- Place the lamp on the opposite side of the hand that holds the mouse or writes.
- Position the lamp for easy adjustment.
- Ensure that your lamp is placed to avoid glare on screens and prevent direct glare in your field of vision.






ABOUT UNILUX


Founded in 1952, UNILUX is a French company specializing in lighting and ergonomics. Over the past 25 years, UNILUX has become a benchmark in the field of lighting in France and throughout Europe. In 2000, UNILUX joined the French group HAMELIN, a European leader in stationery. The company modernizes and evolves to become a creator of ambiance and well-being.

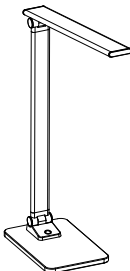


OUR CERTIFICATIONS



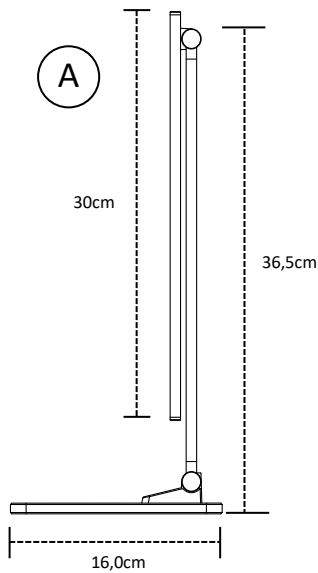
USER GUIDE

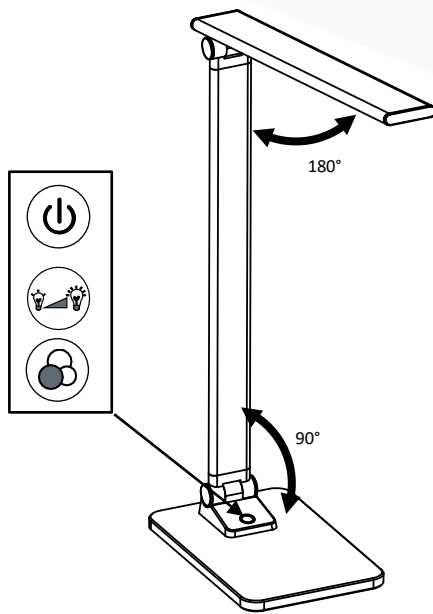
i  x1  1 min 


 www.my-unilux.com

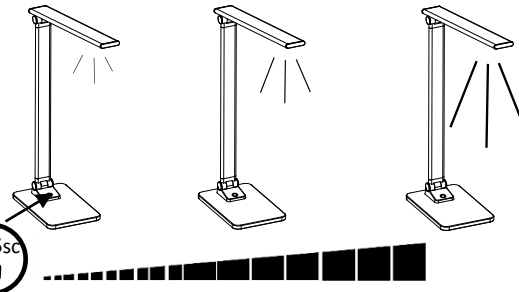
⚙️  **(A)** x1  **(B)** x1  **(C)** x1

INPUT : 100-240V ~ 50/60 Hz
EXIT : DC 5V, 1A

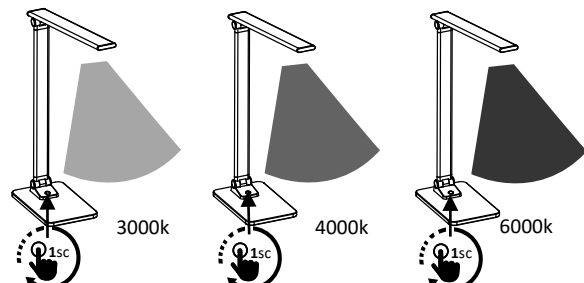
(A)  30cm, 36,5cm, 16,0cm

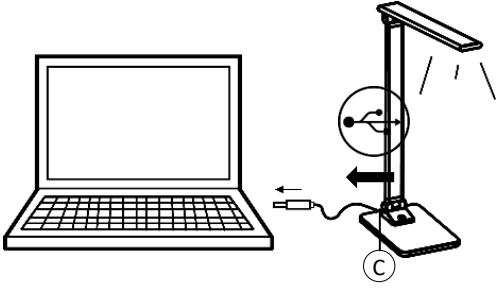
 180°, 90°

 Dimming switch to increase or decrease brightness

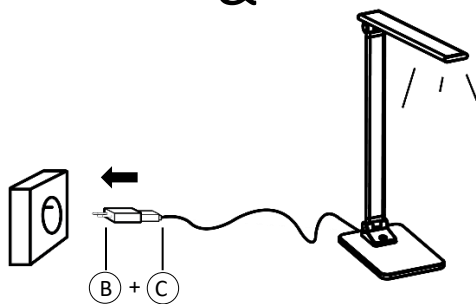
 5sc

⊛ 3 adjustable color temperatures

 3000k, 4000k, 6000k, 1sc

 **(C)**

&

 **(B) + (C)**

pCon Planner

Integrate Unilux products seamlessly into your 3D space designs.
Access to essential data : dimensions, prices, etc.



Website






Explore our full range, tips, blog articles, and more.



Do you have any questions ?

Our customer service is always available to assist you.

GLOSSARY

-  ON / OFF
-  Light intensity dimming
-  Color temperature dimming
-  Replaceable light source (LED only) by a professional.
-  European compliance